

First Choice !

ULV cold fogger



NEBULO

The most important quality features are:

- manufactured from strong durable resistant thermoplastics
- more powerful electric motor producing greater aerosol volume at higher velocity with deeper penetration
- more uniform droplet spectrum
- droplet size can be regulated by increasing or decreasing the solution flow


Due to these characteristics our foggers offer the following advantages:

- highly versatile and the ideal equipment for the application of insecticides, disinfectants, deoderants
- the range of the fog is deeper than with comparable units
- the range of application includes space and surface treatment
- easy handling and operating the unit

Fields of application for NEBULO and NEBUROTOR, e.g.:

- public health
- horticulture
- public services and utilities
- storage warehouses
- transportation
- vaccination of poultry
- disinfection
- recreation facilities
- workplaces and waste disposals
- livestock protection
- food industry
- catering trade

DIN EN ISO 9001:2008

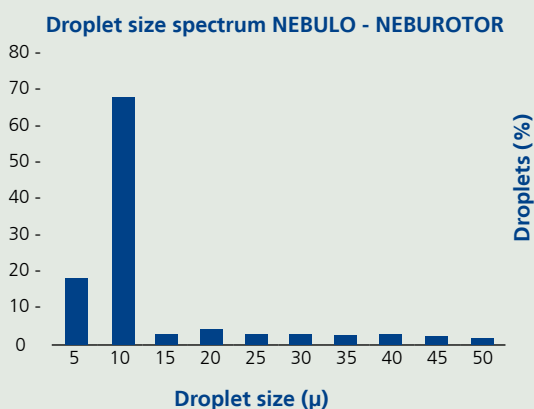

NEBUROTOR



The **NEBUROTOR** and **NEBULO** is fitted with an infinitely adjustable through flow meter. This makes an output between 5 and maximum 250 ml/min. (0.3-15l/h) possible. Even with the largest output, the droplet size is still under 30 µ.

The **NEBUROTOR** is the result of consistent further development in order to facilitate operation and handling. The device is technically equipped just like the **NEBULO**. However, the **NEBUROTOR** is fitted on a panel, through which the device can automatically rotate between 90° and 360°.

The **NEBUROTOR** can also be fitted to the wall, by means of a wall support. If set to a rotation of 180°, the reach of the spray can be doubled. As a further accessory, we also offer a „timer“, with which you can program the device for automatic fogging!

Technical specifications: NEBULO - NEBUROTOR

Electric motor*	230/240 V 50/60 Cycles, 700 Watt
Dimensions, H x W (in cm)	40 x 35
Netweight, in (kg)	3.8
Solution tank, Ø (in cm)	25
Solution tank capacity, in l (PE-HD)	4
Connection cable, approx. in (m)	3
Output infinitely adjustable, in (l/h)	0.3 - 15
Automatically rotation between 90° and 360°	only by Neburotor
Optional Accessories:	
Kit for fresh air supply, with air hose 2 m, Ø 50 mm (optional)	only for Nebulo no. 76-20-000-00
Wall support (optional)	Neburotor - Nebulo

*other voltages available upon request



IGEBA Geraetebau GmbH
P.O.Box 6
D-87478 Weitnau | Germany

T +49 (0) 8375 9200-0
F +49 (0) 8375 9200-22

info@igeba.de
www.igeba.de