


Thermal Fog Generator

TF 35

Made in Germany.

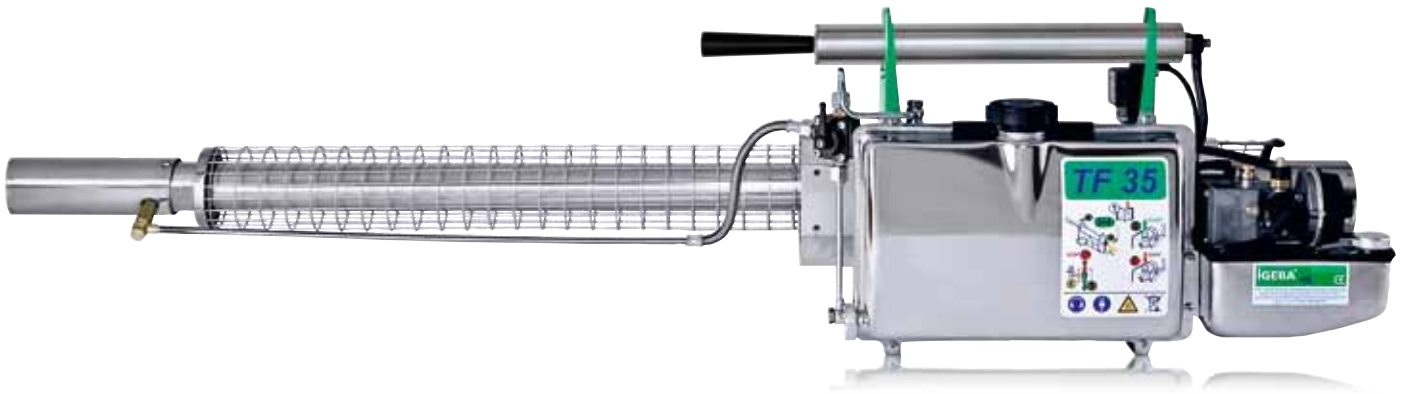

Characteristics

The TF 35 fog generator is the first choice since more than 25 years. When we set out with the firm intention of producing the best equipment on the market, **there were no limits imposed by an existing range of models!**

This unit has been designed for use with insecticides, acaricides, fungicides and disinfectants! Light weight for convenient use in areas where poor roads and tracks make it difficult to handle heavy equipment. The only mass produced unit with air intake valve covered, providing a **silencer effect and protection against dust and solution particles.**

- **Petrol tank** made from stainless steel
- **Fog tube** made from stainless steel
- **Formulation tank** made from stainless steel
- **Air pump** made from stainless steel
- **Reliable ignition system** without spark plug

All other parts getting in contact with the chemicals are made from **brass, Viton or Teflon.**

Emergency cut-off device for solution available upon request.

Technical specifications

Weight in kg, empty but ready for use	7,9 kg
Dimensions L x W x H in cm	137,5 x 27 x 34
Solution tank capacity in l	
standard	5,7
option	10
Fuel tank capacity, in l	1,2
Fuel consumption, approx. in l/h	2,0
Performance of combustion chamber in KW/HP	18,7 / 25,4
Maximum flow rate, approx. in l/h	42
Effective horizontal reach, indoors, approx. in m (water based with carrier, i.e. NEBOL)	40
(oil based)	> 100
Power supply Flashlight batteries	4 x 1,5 V LR20 (LR6 option)

Considering the maximum flow rate, an operator can treat at a flow rate of 1 litre/2.500 m³ up to 105.000 m³/h or 3.708.000 ft³/h.

TF 35 applies oil based formulations with the standard fog tube. A special „W“ fog tube is available for the application of water based formulations.



IGEBA

IGEBA Geraetebau GmbH
Heinrich-Nicolaus-Str. 15
D-87480 Weitnau/Germany

T +49 (0) 8375 9200-0
F +49 (0) 8375 9200-22

info@igeba.de
www.igeba.de

TF 35 – The all time favorite